

Fast Recovery Diodes, 135A

Features

- Diffused Series
- Industrial grade
- Excellent surge capabilities
- Available in Normal and Reverse polarity
- Optional Avalanche Characteristic



DO-205AA (DO-8)


| Electrical Specifications (T _A = 25°C, unless otherwise noted) | | | |
|---|--|--------|--------------------|
| Symbol | Parameters | Values | Units |
| I _{F(AV)} | Maximum avg. forward current | 135 | A |
| V _{FM} | Maximum peak forward voltage drop @ rated I _{F(AV)} | 1.7 | V |
| I _{FSM} | Maximum peak one cycle (non-rep) surge current | 2500 | A |
| I ² t | Maximum I ² t rating (non-rep) | 31250 | A ² sec |
| t _{rr} | Reverse recovery time | 300 | ns |

| Electrical Ratings (T _A = 25°C, unless otherwise noted) | | | | | | |
|--|--------------|--|---|--|-------------------------------------|--|
| Type number | Voltage Code | V _{RRM} , Maximum repetitive peak reverse voltage (V) | V _{R(RMS)} , Maximum RMS reverse voltage (V) | V _R , Maximum DC blocking voltage (V) | Recommended RMS working voltage (V) | I _{R(AV)} , Maximum avg. reverse leakage current (μA) |
| 135NSF(R) | 10 | 100 | 70 | 100 | 40 | 25 |
| | 20 | 200 | 140 | 200 | 80 | |
| | 40 | 400 | 280 | 400 | 160 | |
| | 60 | 600 | 420 | 600 | 240 | |
| | 80 | 800 | 560 | 800 | 320 | |
| | 100 | 1000 | 700 | 1000 | 400 | |
| | 120 | 1200 | 840 | 1200 | 480 | |
| | 140 | 1400 | 980 | 1400 | 560 | |
| | 160 | 1600 | 1120 | 1600 | 640 | |

| Thermal & Mechanical Specifications (T _A = 25°C, unless otherwise noted) | | | |
|---|--|------------|-------|
| Symbol | Parameters | Values | Units |
| R _{th(jc)} | Maximum thermal resistance, junction to case | 0.4 | °C/W |
| T _J | Operating junction temperature range | -55 to 150 | °C |
| T _{stg} | Storage temperature | -55 to 150 | °C |
| F | Mounting torque (non-lubricated threads) | 10 | Nm |
| W | Approximate allowable weight | 150 | g |

Package Outline

(All dimensions in mm)

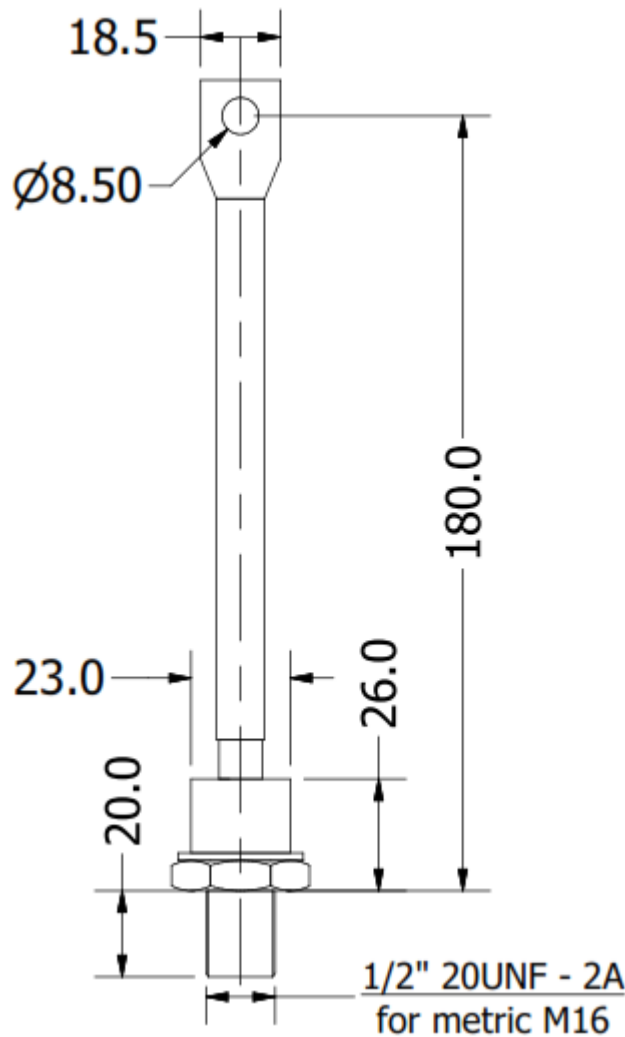

Ordering Table

| 135 | NS | F | R | 120 |
|-----|----|---|---|-----|
| 1 | 2 | 3 | 4 | 5 |

1 – Current Rating = $I_F (AV)$

2 – Rectifier Diode

3 – Fast Recovery

4 – Polarity:

> None = Normal (Cathode to Stud)

> R = Reverse (Anode to Stud)

5 – Voltage Code x 10 = V_{RRM} (See Voltage Ratings Table)