


Glass Passivated Single-Phase Bridge Rectifier, 15A


Features

- Glass passivated chip junction
- Low reverse leakage current
- High surge current capability
- Low power loss
- High efficiency
- Electrically isolated metal case for maximum heat dissipation

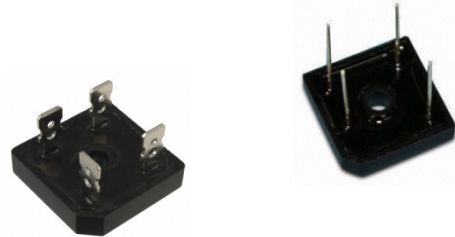

Mechanical Data

- Case: Molded plastic body with heatsink
- Terminals: Plated lead Solderable (Add "W" suffix for Wire Leads)
- Polarity: As marked on Case
- Mounting: Through hole for #10 Screw
- Mounting Torque: 20 in-lbs max.
- Weight: 18 grams (approx)



Maximum Ratings & Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)										
Parameter	Symbol	GBPC15(W)								Units
		005	01	02	04	06	08	10	12	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1200	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	840	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1200	V
Average rectified output current	I_O	15								A
Non-repetitive peak forward surge current, single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	300								A
DC forward voltage drop per element @ 7.5 A	V_F	1.1								V
Peak reverse current at rated DC blocking voltage	$T_C = 25^\circ\text{C}$	5.0								μA
	$T_C = 125^\circ\text{C}$									
Typical junction capacitance (Note 1)	C_J	300								pF
Typical thermal resistance (Note 2)	$R_{\theta J-C}$	1.9								$^\circ\text{C}/\text{W}$
RMS isolation voltage	V_{ISO}	2500								V
Operating and Storage temperature	T_J, T_{STG}	-55 to +150								$^\circ\text{C}$

NOTES:

- (1) Measured @ 1.0 MHz and applied reverse voltage of 4.0V DC.
- (2) Thermal resistance from Junction to Case per leg.

