


IGBT Module, 1200V/150A

Features

- 1200V 150A, $V_{CE(sat)}=2.50V$
- Planar Field-stop Technology
- High RBSOA capability
- Low turn-off losses

Applications

- Inductive Heating
- Welding
- High Frequency switching Application
- UPS System
- Power Supplies

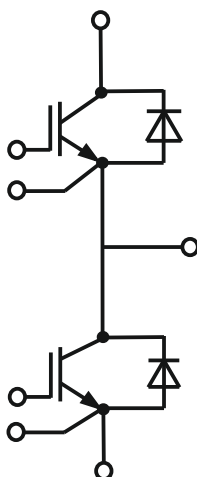

IGBT, Inverter/IGBT, Maximum Rated Values				
Parameter	Conditions	Symbol	Values	Units
Collector-Emitter Voltage	$T_{vj} = 25^{\circ}C$	V_{CES}	1200	V
Total Power Dissipation	$T_c = 25^{\circ}C, T_{vjmax} = 150^{\circ}C$	P_{tct}	835	W
Continuous DC Collector Current		$I_{C\ nom}$	150	A
	$T_c = 80^{\circ}C, T_{vjmax} = 150^{\circ}C$	I_C	175	
Repetitive Peak Collector Current	$I_{CRM} = 2 \times I_{C\ nom}$	I_{CRM}	300	A
Gate-emitter peak voltage		V_{GES}	± 20	V

Diode, Inverter Maximum Rated Values				
Parameter	Conditions	Symbol	Values	Units
Peak Repetitive Reverse Voltage	$T_{vj} = 25^{\circ}C$	V_{RRM}	1200	V
Continuous DC Forward Current		I_F	150	A
Repetitive Peak Forward Current	$I_{CRM} = 2 \times I_{C\ nom}$	I_{FRM}	300	A

Module				
Parameter	Conditions	Symbol	Values	Units
Isolation Test Voltage	RMS, $f=50Hz, t=1min$	V_{iso}	3000	V
Material of Module Baseplate			Cu	
Internal Isolation	Basic insulation (class1, IEC61140)		Al_2O_3	
Creepage Distance	terminal to heatsink terminal to terminal		29.0 23.0	mm
Clearance	terminal to heatsink terminal to terminal		23.0 11.0	mm
Comparative Tracking Index		CTI	>400	



Characteristics Values

IGBT						
Parameter	Conditons	Symbol	Min.	Typ.	Max.	Units
Collector-Emitter Saturation Voltage	$I_C = 150A, V_{GE} = 15V, T_{vj} = 25^{\circ}C$ $I_C = 150A, V_{GE} = 15V, T_{vj} = 125^{\circ}C$ $I_C = 150A, V_{GE} = 15V, T_{vj} = 150^{\circ}C$	V_{CEsat}		2.50 2.90 3.00	3.10	V
Gate Threshold Voltage	$V_{CE} = V_{GE}, I_C = 2 mA, T_{vj} = 25^{\circ}C$	$V_{GE(th)}$	5.0	6.0	7.0	V
Gate Charge	$V_{GE} = -15V.....+15v$	Q_G		1.06		nC
Internal Gate Resistor	$T_{vj} = 25^{\circ}C$	R_{Gint}		5.0		Ω
Input Capacitance	$V_{CE} = 25V, V_{GE} = 0V, f = 1MHz,$	C_{ies}		6.40		nF
Reverse Transfer Capacitance		C_{res}		0.30		
Collector-Emitter Cutoff Current	$V_{CE} = 1200V, V_{GE} = 0V, T_{vj} = 25^{\circ}C$	I_{CES}			2	mA
Gate-emitter Leakage current	$V_{CE} = 0V, V_{GE} = \pm 20V, T_{vj} = 25^{\circ}C$	I_{GES}			± 200	nA
Turn-on Delay Time Inductive Load	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $R_{Gon} = 1.0\Omega, T_{vj} = 150^{\circ}C$	t_{don}		45 45 45		ns
Rise Time Inductive Load	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $R_{Gon} = 1.0\Omega, T_{vj} = 150^{\circ}C$	t_r		30 35 40		ns
Turn-off Delay Time Inductive Load	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $R_{Goff} = 10\Omega, T_{vj} = 150^{\circ}C$	t_{doff}		350 385 390		ns
Fall Time Inductive Load	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $R_{Goff} = 10\Omega, T_{vj} = 150^{\circ}C$	t_f		20 30 40		ns
Turn-on Energy Loss per Pulse	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $L_{\sigma} = 80nH, V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $V_{GE} = \pm 15V, R_{Gon} = 1.0\Omega, T_{vj} = 150^{\circ}C$	E_{on}		13.0 20.0 22.0		mJ
Turn-off Energy Loss per Pulse	$I_C = 150A, V_{CE} = 600V, T_{vj} = 25^{\circ}C$ $L_{\sigma} = 80nH, V_{GE} = \pm 15V, T_{vj} = 125^{\circ}C$ $V_{GE} = \pm 15V, R_{Goff} = 10\Omega, T_{vj} = 150^{\circ}C$	E_{off}		3.8 6.0 6.5		mJ
Thermal Resistance Junction to case	Per IGBT	$R_{th JC}$		0.140		K/W
Temprature under switching conditions		$T_{vj op}$	-40		150	$^{\circ}C$




Characteristics Values

Diode						
Parameter	Conditons	Symbol	Min.	Typ.	Max.	Units
Forward Voltage	$I_F = 150A, V_{GE} = 0V$ $I_F = 150A, V_{GE} = 0V$ $I_F = 150A, V_{GE} = 0V$	$T_{vj} = 25^{\circ}C$ $T_{vj} = 125^{\circ}C$ $T_{vj} = 150^{\circ}C$		2.20 2.20 2.15	2.70	V
Peak Reverse Recovery Current	$I_F = 150A, V_R = 600V$ $-di/dt = 2580aA/us (T_{vj} = 25^{\circ}C)$ $V_{GE} = -15V$	$T_{vj} = 25^{\circ}C$ $T_{vj} = 125^{\circ}C$ $T_{vj} = 150^{\circ}C$		90 90 90		A
Recovery Charge	$I_F = 150A, V_R = 600V$ $-di/dt = 2580aA/us (T_{vj} = 25^{\circ}C)$ $V_{GE} = -15V$	$T_{vj} = 25^{\circ}C$ $T_{vj} = 125^{\circ}C$ $T_{vj} = 150^{\circ}C$		7.5 12.5 17.5		uC
Reverse Recovery Energy	$I_F = 150A, V_R = 600V$ $-di/dt = 2580aA/us (T_{vj} = 25^{\circ}C)$ $V_{GE} = -15V$	$T_{vj} = 25^{\circ}C$ $T_{vj} = 125^{\circ}C$ $T_{vj} = 150^{\circ}C$		3.5 6.5 7.5		mJ
Thermal Resistance Junction to case	Per Diode	R_{thJC}		0.252		K/W
Temprature under switching conditions		$T_{vj op}$	-40		150	$^{\circ}C$

Module						
Parameter	Conditons	Symbol	Min.	Typ.	Max.	Units
Thermal resistance Case to Heatsink	per Module	R_{thCH}		0.01		K/W
Stray Induction Module		L_{sCE}		20		nH
Module Lead Resistance Terminals-Chip	$T_C = 25^{\circ}C$ per switch	$L_{CC'+EE'}$		0.70		mΩ
Storage Temerature		T_{stg}	-40		125	$^{\circ}C$
Mounting torque	Terminal M6	F	2.5		5.0	Nm
	Module M6		3.0		6.0	
Weight		W			320	g

Circuit Schematic

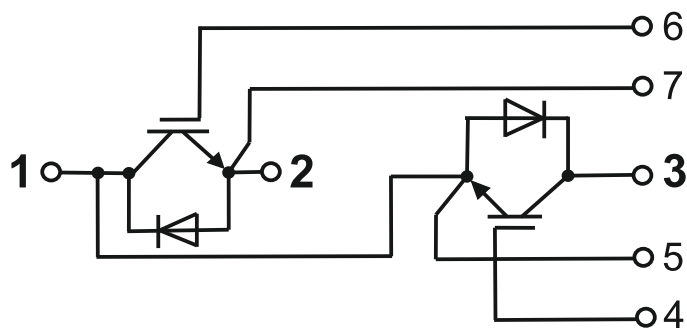

Package Outline

(All dimensions in mm)

